



Groundwork

STERLING TILTING HAMMER



Job Application

Significantly wider offering & 4 market segments enable further success.

SEA SIDE




RIVER SIDE



SAND FIELD



CONFINED SPACE JOB SITE


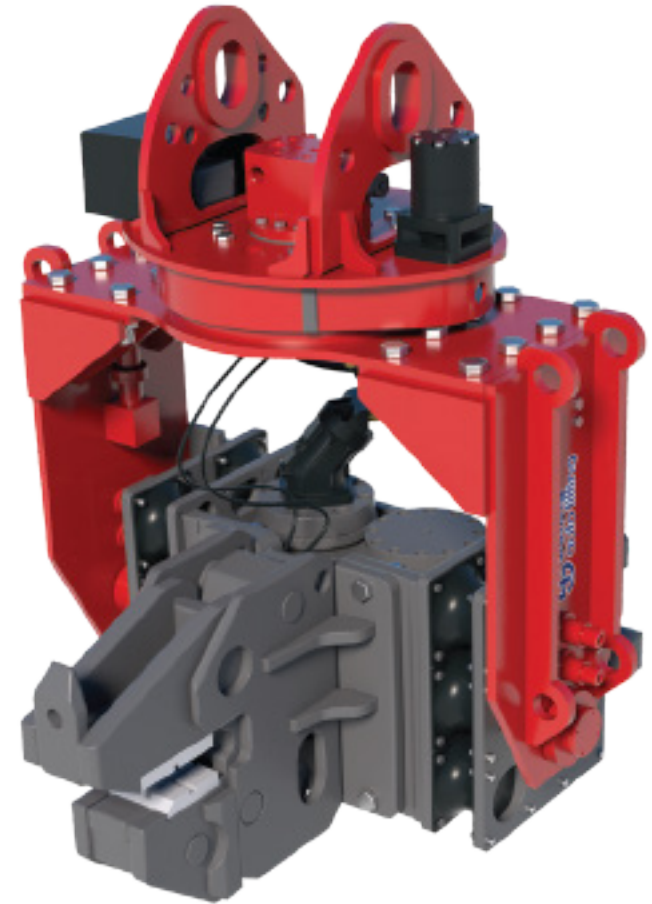


FEATURES

- More efficient and safer to work with
 - 90degree tilt/ 360° hydraulic rotation function enables safer work and better efficiency.
- *Auto hold* function on 90 degree tilting position
- Low maintenance cost & easy maintenance
 - Compact design with no failure-prone cylinders of tilting function
 - Concise structure of components
- Rigid and durability
 - Double bearing structure and rigid rubber cushion
- Easy installation and operation
 - Concise operation electric kits




MODEL	UNIT	SH25 Tilting	SH30 Tilting	SH40 Tilting
Excavator	ton	20-26	28-36	36-50
Weight	kg	1620	1910	2250
Extension boom weight	kg	560	710	830
Setting Pressure	bar	250	250	280
Oil Flow	lpm	170-200	180-220	240-260
Centrifugal force	kn	520	610	700
Frequency	bpm	2800 - 3600	2600-3600	2200-2800
Rotation	deg	360	360	360
Tilt Angle	deg	90	90	90
Jaw Open	mm	65	65	65
Dimension (A x B x C)	mm	1326 x 711 x 2089	1326 x 805 x 2089	1435 x 900 x2180

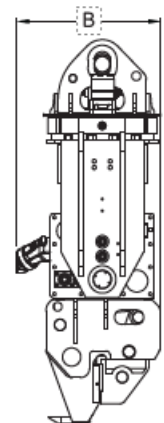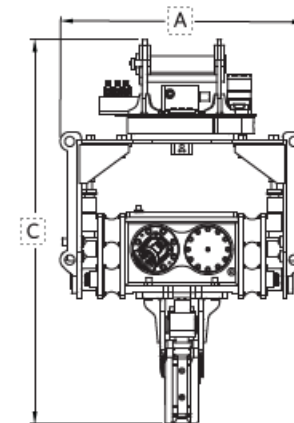

STERLING AUTO TILTING HAMMER

WORKING RANGE - SH25 TILTING / SH30 TILTING / SH40 TILTING

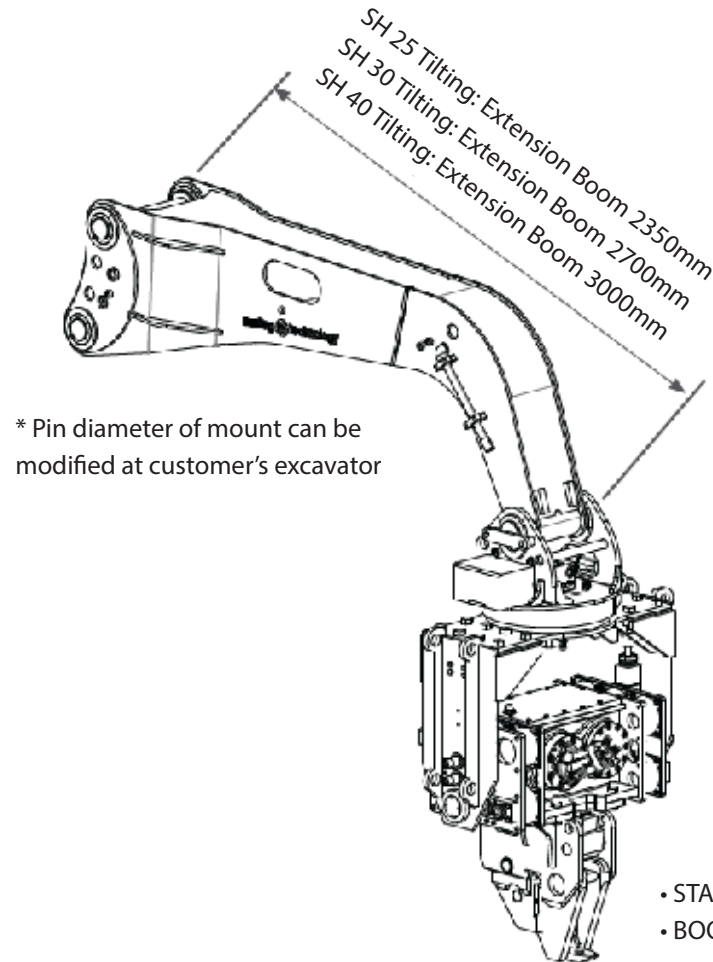

MODEL	Suitable Excavator
SH25 Tilting	20-30 ton
SH30 Tilting	30-40 ton
SH40 Tilting	40-55 ton


* Specifications are subject to change without notification




- STANDARD - SH25 Tilting: 8.5m / SH30 Tilting: 10.5m / SH40 Tilting: 11.5m
- BOOM ADJUST - SH25 Tilting: 9.5m / SH30 Tilting: 11.5m / SH40 Tilting: 12.5m

WORKING RANGE - SH25 TILTING

- Suitable Excavator: 20 - 26 ton

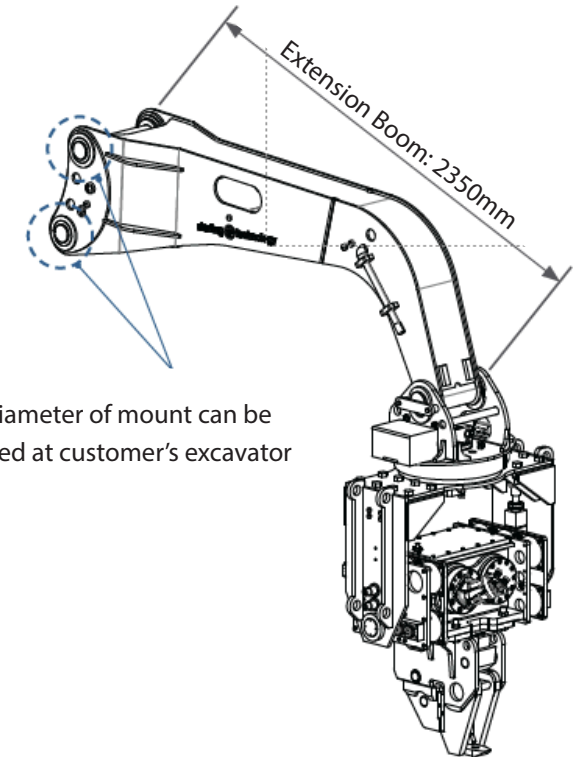



Main Body	1620 kg
Ext Boom	500kg
Total	2120kg

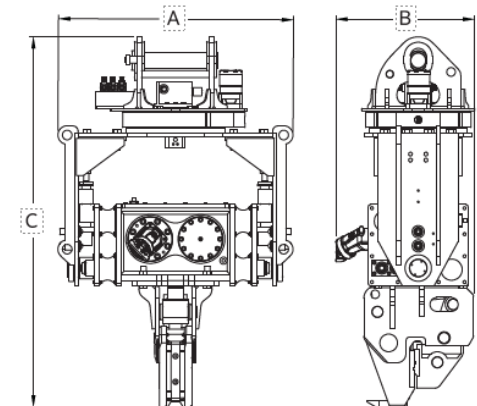

A x B x C: 1326 x 711 x 2089


WORKING RANGE - SH30 TILTING

- Suitable Excavator: 28 - 36 ton

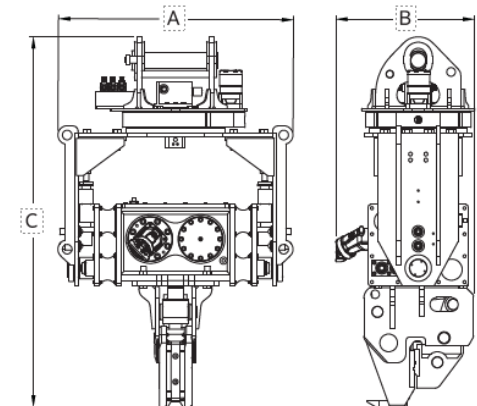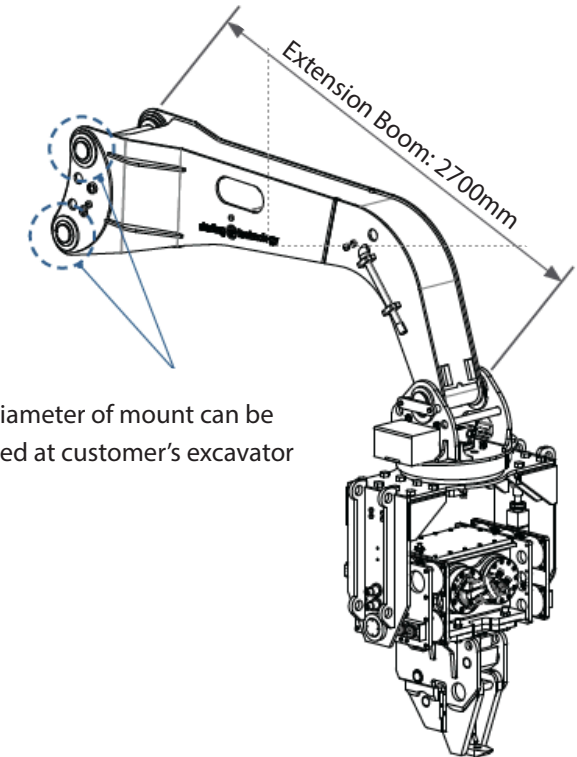


WORKING RANGE - SH40 TILTING

- Suitable Excavator: 35- 50 ton

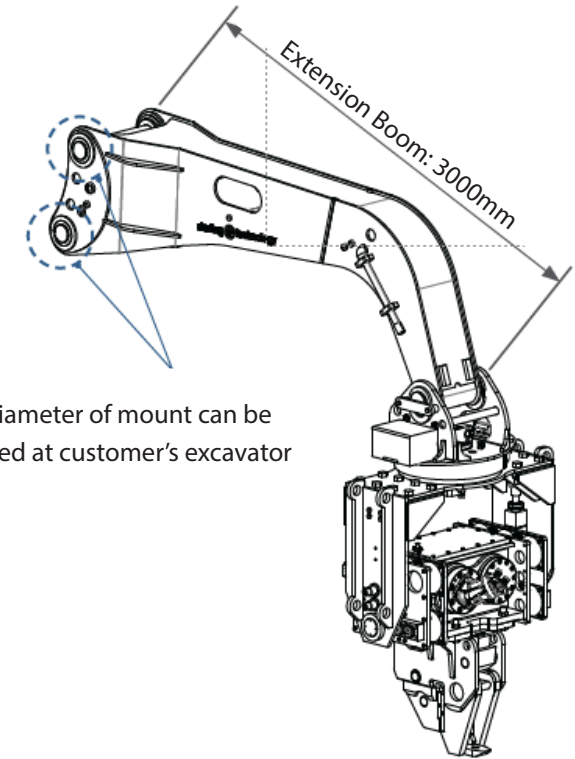

Main Body	2250 kg
Ext Boom	770kg
Total	3020kg

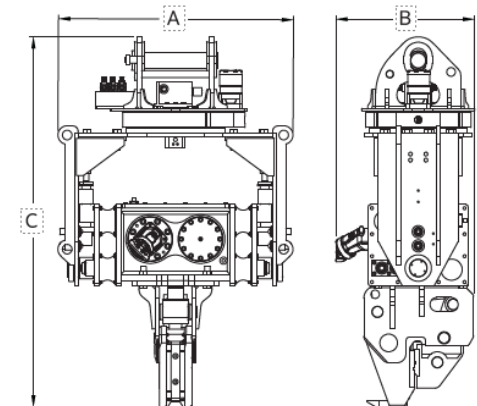

A x B x C: 1435 x 900 x 2180